

■ **Features**

- Slim size and low-resistance.
- Quick charge & discharge.
- High output current.
- Environmentally friendly products.
- RoHS compliant.

■ **Applications**

- Pulse power demand.
- Hybrid battery packs.
- SSD.
- Wireless communications.
- LED Flash Light.
- Energy harvesting.



1. Specifications :

Operating Temp.	-40 to +70°C	
Storage Temp.	-40 to +85°C	
Characteristics	Capacitance range	-20% to +80% of initial measured value at +20°C
	Internal resistance range	≤ 1.5 times of initial measured value at +20°C
Endurance	Capacitance change	±30% of initial measured value (-40 to +70°C)
	Internal resistance change	≤ 2 times of initial specified value (at -20°C)

Note :

1. Capacitance measured at **10mA** discharged current from capacitor operation voltage to zero.
2. ESR @1 KHz measured by **0.25mA** sinusoidal wave. The period of sine wave is 1 mini-second (1 KHz frequency).
3. Not allowed to go through reflow and wave solder process.
4. Hand Soldering temperature **340°C < 8 sec.**

P/N	Nominal Voltage (V)	Max. Voltage (V)	Typical ESR ² (mΩ)	Capacitance ¹ (mF)	Leakage Current (μA)	Surge Voltage (V)
UC0905006J13S	5.2	5.4	450	6	< 30	6.0
UC0905015J13S	5.2	5.4	450	15	< 30	6.0




2. Part Numbering System :


UC └	09 └	05 └	006 └	J └	13 └	S └
DURA	Body Size 09 = 9mm x 7mm	Nominal Voltage 05 = 5.2V	Capacitance code 006 = 6mF	Package J = 0907	Thickness 13 = 1.3mm	Lead Format S = SMD

3. Electrical Characteristics :

(a) Capacitance vs. Temperature

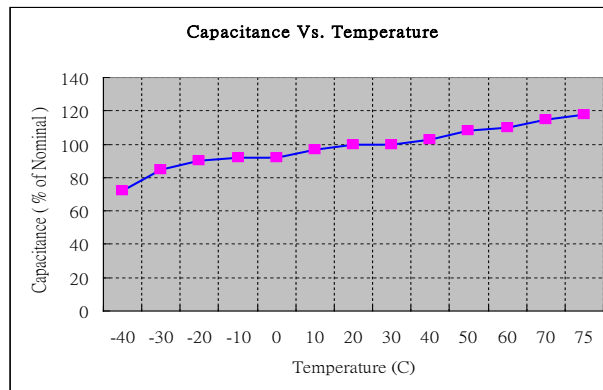


(b) ESR vs. Temperature

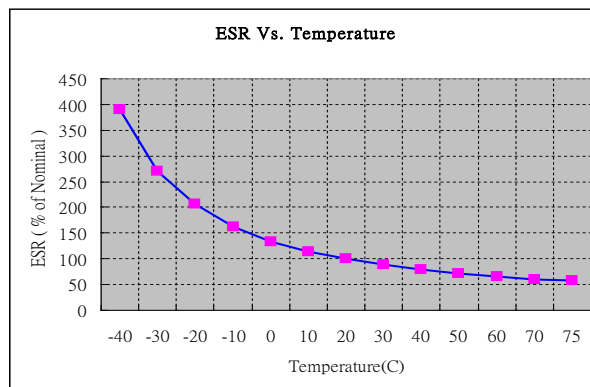


4. Mechanical Specifications :

4.1 Dimensions (mm) :

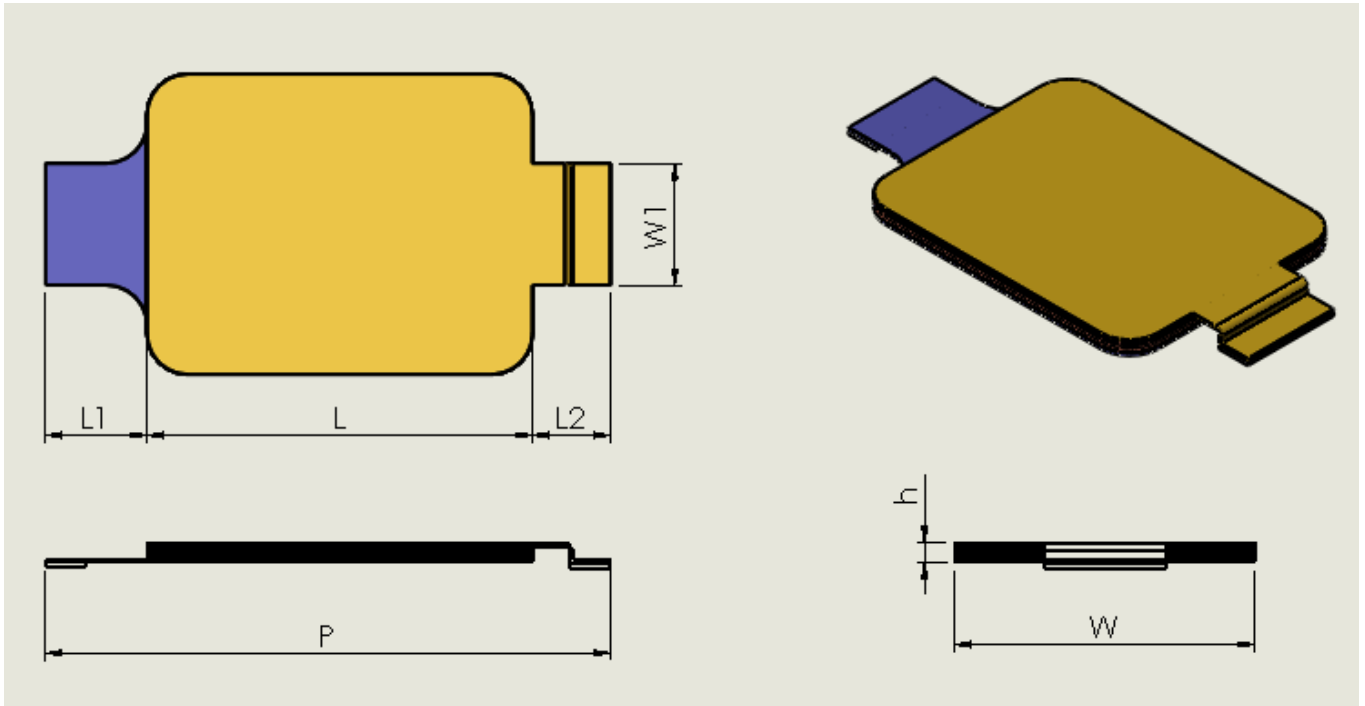

P/N	L	L1	L2	P	W	W1	H	
UC0905006J13S	9.6±0.2	2.0±0.2	3.0±0.2	14.6±0.4	7.5±0.2	3.2±0.2	1.3±0.2	
UC0905015J13S	9.6±0.2	2.0±0.2	3.0±0.2	14.6±0.4	7.5±0.2	3.2±0.2	1.3±0.2	
The lead material : Nickel							Unit : mm	

4.2 Layout :

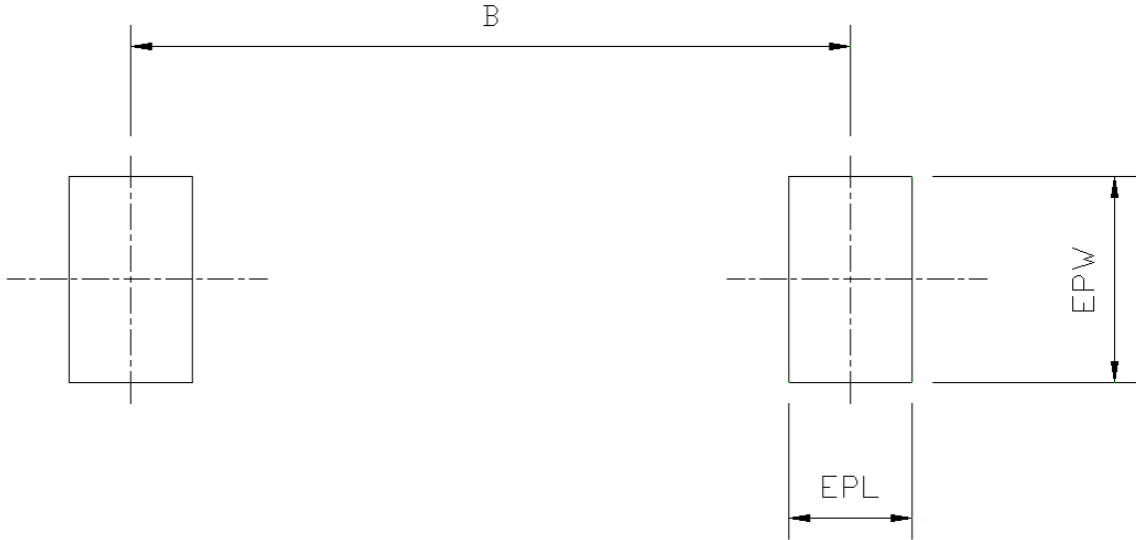

Dimensions	Nominal	Tolerance
B	14.6	±0.1
EPW	5.0	±0.1
EPL	2.7	±0.1
Unit : mm		

4.3 Lable :


Brand logo →

Specification →

Lot Number →



4.4 Packaging Specifications :

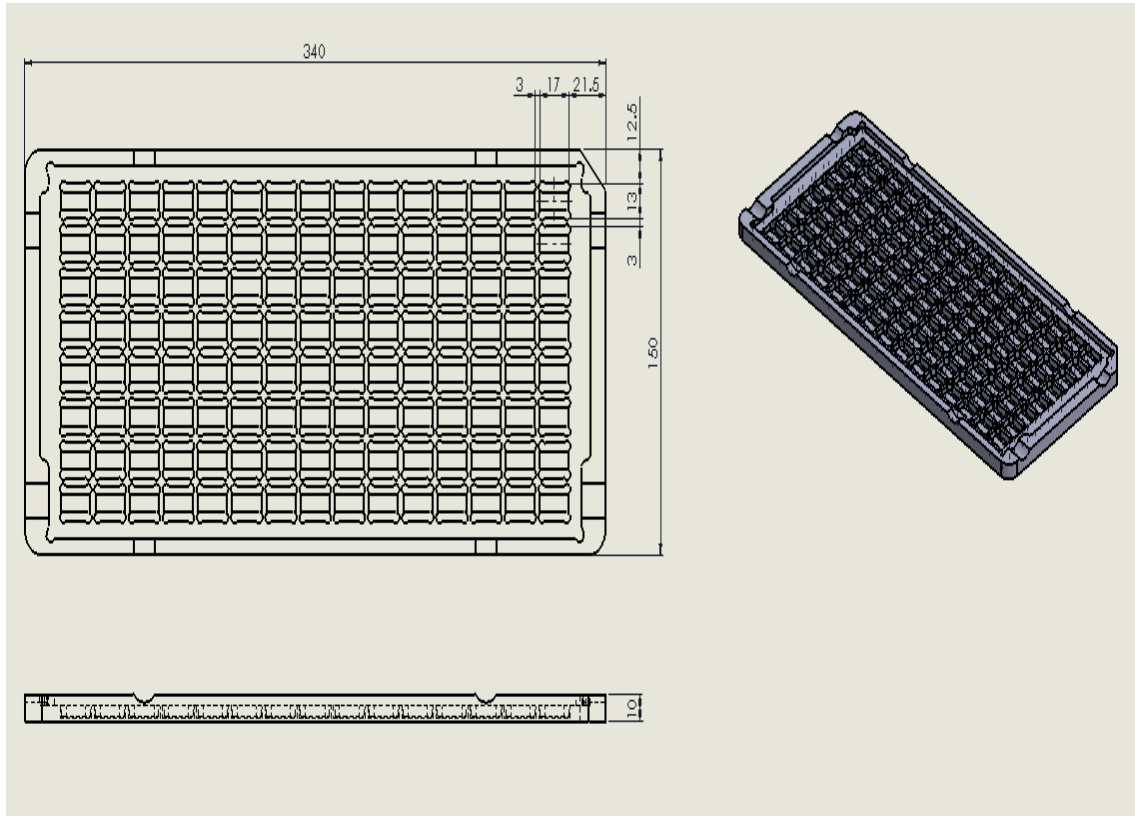

Packaging Quantities :

No. of Row	No. of Columns	Pieces / Tray
8	15	120



5. Qualification Test Summary :

Items	Test	Test Method	Parameter	Limits	
1	Initial Cap. Measurement	Discharge cells with a constant current after a full charge.	Cap.	+80% /-20% of rated Cap.	
2	Initial DCL. Measurement	Apply rated voltage. Note current after 3 hours.	Leakage Current	Within limit	
3	Initial ESR. Measurement	Measurement frequency @1KHz.	ESR	≤ 1.5x of rated ESR.	
4	Humidity Life	Maintain at 40°C/95% RH for 1000 hours. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL	≤ 2.0 x rated max.	
			Cap.	≥ 0.7 x rated	
			ESR.	≤ 1.5 x rated	
5	Leg pull strength	Apply an increasing force in PIN until leg pulls away.	Yield Force	Not less than 5 pounds	
6	Surge Voltage	Step 1. Apply surge voltage for 10 seconds.	DCL	≤ 2.0 x rated max.	
		Step 2. Short the cell for 10 seconds.	Cap	≥ 0.7 x rated	
		Step 3. Repeat 1 and 2 for 1000 cycles.	ESR	≤ 2.0 x rated	
7	Temperature Cycling	Step 1. Ramp oven down to -40°C and then hold for 30min	DCL	≤ 1.5 x rated max.	
		Step 2. Ramp oven up to 75°C, then hold for 30 min.	Cap.	≥ 0.7 x rated	
		Step 3. Repeat 1 and 2 for 100 cycles.	ESR.	≤ 1.5 x rated	
8	Temperature Characteristics	Maintain at -40°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL	DCL ≤ 3 x rated.	
			Cap.		Cap. ≥ 0.7 x rated
			ESR.		
		Maintain at -20°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL	ESR ≤ 2.0 x rated	
			Cap.		
			ESR.		
		Maintain at -10°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL		
			Cap.		
	ESR.				
Maintain at 0°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL				
	Cap.				
	ESR.				
Maintain at 25°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL				
	Cap.				
	ESR.				
Maintain at 40°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL				
	Cap.				
	ESR.				
Maintain at 70°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL				
	Cap.				
	ESR.				
Maintain at 75°C for 4 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL				
	Cap.				
	ESR.				
9	Thermal Shock	Place cells into an oven at -40°C for 30 min.	DCL	≤ 2.0 x rated max.	
		in less than 15seconds, then move to 75°C oven for 30min.	Cap.	≥ 0.7 x rated	
		Repeat the action for 100cycles.	ESR.	≤ 2.0 x rated	
10	Shelf Life	Maintain at 70°C for 1000 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL	≤ 1.5 x rated max.	
			Cap.	≥ 0.7 x rated	
			ESR.	≤ 2.0 x rated	
11	Load Life	Apply nominal voltage at 70°C for 1000 hour. Allow to cool to room temperature and measure Cap. DCL and ESR.	DCL	≤ 2.0 x rated max.	
			Cap.	≥ 0.7 x rated	
			ESR.	≤ 2.0 x rated	